


STAR CONSTRUCTION — HULL FRAMING

(At deck level.)

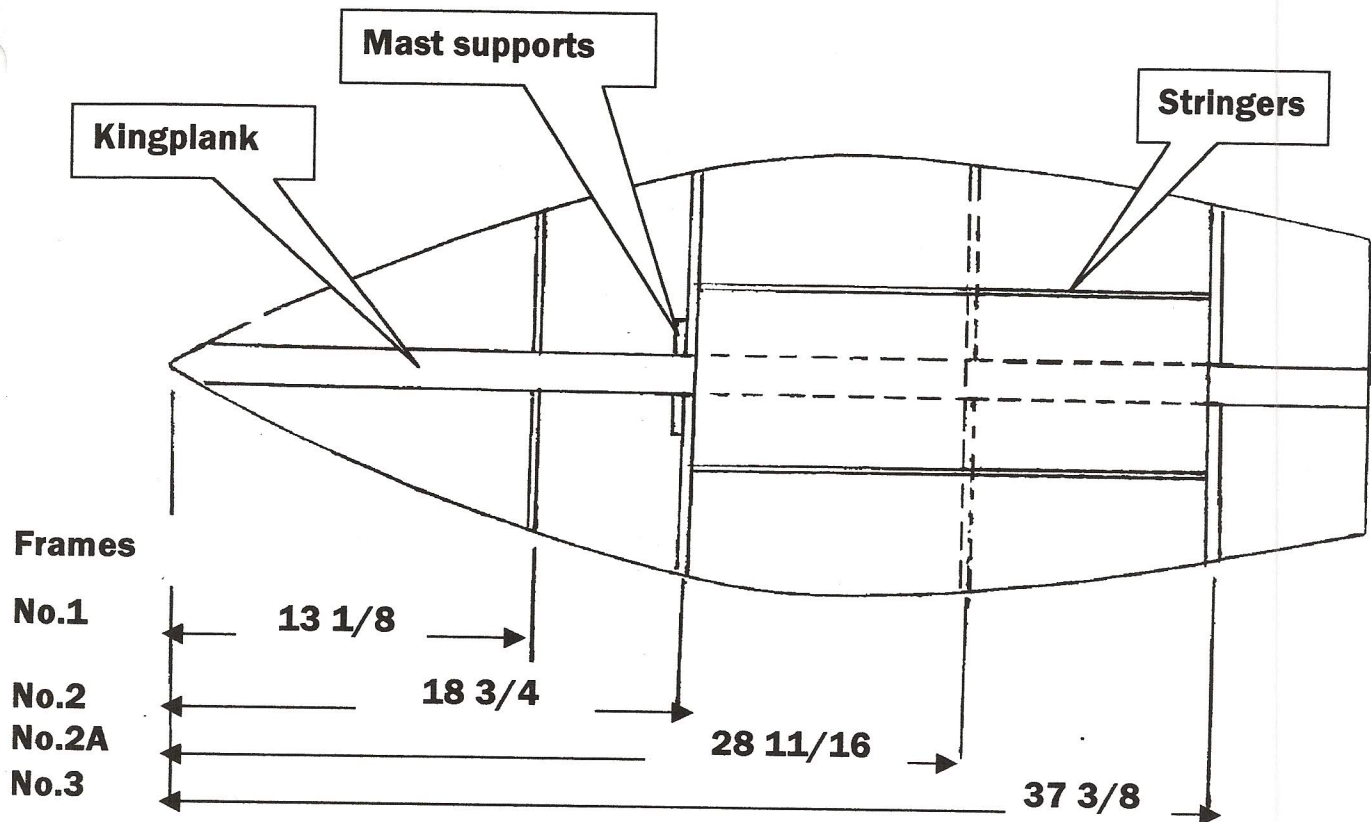

1) Frames #2 & #3 are 18 5/8" apart. This allows the spread needed for the traveling pulley when using a drum winch.

2) Frame #2A provides for a smaller hatch opening if desired.

3) The king plank running down the center can be cut out to suit any hatch configuration.

4) Each frame should be slightly angled to fit the curve of the hull and glued in place with a small amount of 30 min. epoxy.

5) The 2 stringers should be cut to fit as needed and glued into place.

6) The 2 mast supports are to be glued into place.